

AIR TO WATER HEAT PUMP  
R32 monobloc

NEW



A Carrier Company

 **Beretta**



# HYDRO UNIT M

## BERETTA'S NEW AIR TO WATER HEAT PUMP WITH LOW ENERGY CONSUMPTION


The HYDRO UNIT M range of heat pumps is an ideal solution for heating, cooling and production of sanitary domestic hot water, and is available in ten different models with power capacity from 4 kW to 16 kW. Equipped with Twin Rotary compressor with DC-Inverter technology, they operate in a temperature range of -25°C to +43°C and can achieve high leaving water temperature up to 65°C. Advanced Remote Control as standard allows them to be combined with a Beretta boiler for greater comfort in domestic hot water and heating applications.





## EFFICIENCY AND SUSTAINABILITY

The HYDRO UNIT M range of heat pumps uses R32 refrigerant, a gas with a lower global warming potential (GWP) than traditional refrigerant gases. The design of a new s hermetically ealed circuit for the fluorinated gases, the use of R32, reduced charge volumes, lower CO<sub>2</sub> emissions, and increased energy efficiency are the characteristics which set HYDRO UNIT M apart and increase its environmental sustainability and energy saving.



## LOW CONSUMPTION AND HIGH EFFICIENCY: PRODUCT STRENGTHS



### GREATER SUSTAINABILITY

Thanks to the use of R32 refrigerant, with low global warming potential (GWP) and lower CO<sub>2</sub> emissions.



### HIGH PERFORMANCE

The ten models available offer power outputs from 4 kW to 16 kW, with fast response to demand and reduced energy consumption, achieving energy efficiency class A+++ up to 35°C and A++ up to 55°C.



### LOW NOISE

The systems' quiet operation is ensured by sturdy structural design, and can be further reduced thanks to the silent mode which can be selected by the user.



### HP KEYMARK CERTIFICATION

The units are certified and listed on the voluntary European HP KEYMARK.



### ANTI-FROST FUNCTION

The HYDRO UNIT M heat pump is designed for external installation and equipped with an anti-frost function to protect the entire hydronic circuit. This function, which can be programmed by the end user, is activated automatically whenever the water in the system falls below a preset temperature, protecting the entire system.



### EASY AND FLEXIBLE

The unit is monobloc having all essential hydraulic components included to facilitate installation and operation.


HYDRO UNIT M is flexible thanks to its ability to respond quickly to the real requirements of the rooms it serves.



# ENERGY EFFICIENCY CLASS A+++ OR A++

## WHY HYDRO UNIT M?

- › Because it **RESPECTS THE ENVIRONMENT** by maximizing the use of energy obtained from renewable sources
- › Because it achieves **ENERGY EFFICIENCY CLASS A+++** in low-temperature applications
- › Because it guarantees **STABILITY OF PERFORMANCE** by supplying water at up to 65°C in a wide range of operating temperatures (from -25°C to +43°C)
- › Because it quickly responds to **DEMAND FROM THE INSTALLATION ENVIRONMENT**
- › Because it **INCREASES THE ENERGY EFFICIENCY** of the buildings in which it is installed, lowering running costs and increasing the economic value

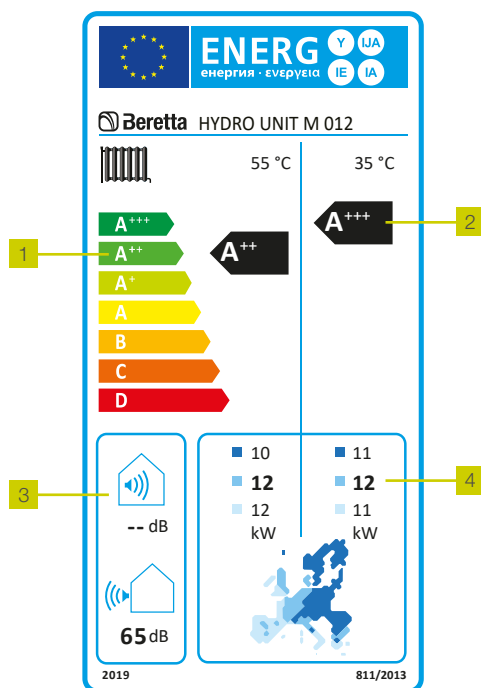


The entry into force of the European ErP Directive (26.09.2015) also requires heat pumps, like other heat generators for production of sanitary domestic hot water and heating, to be classified with the familiar energy efficiency class label. This mandatory labeling provides greater transparency on the characteristics of products for easy comparison, helping customers identify and choose the most efficient products. Beretta's heat pumps with energy efficiency class A+++ (35°C) or A++ (55°C) achieve maximum energy savings and increase the building's value.



- 1 Energy efficiency class of heating at 55°C
- 2 Energy efficiency class of heating at 35°C
- 3 Outdoor sound power level (\*)
- 4 Nominal heat output at 55°C and 35°C in temperate, cold and warm climate conditions (\*)

(\*) Values may differ by model

## TECHNOLOGY FUNCTIONAL ELEMENTS

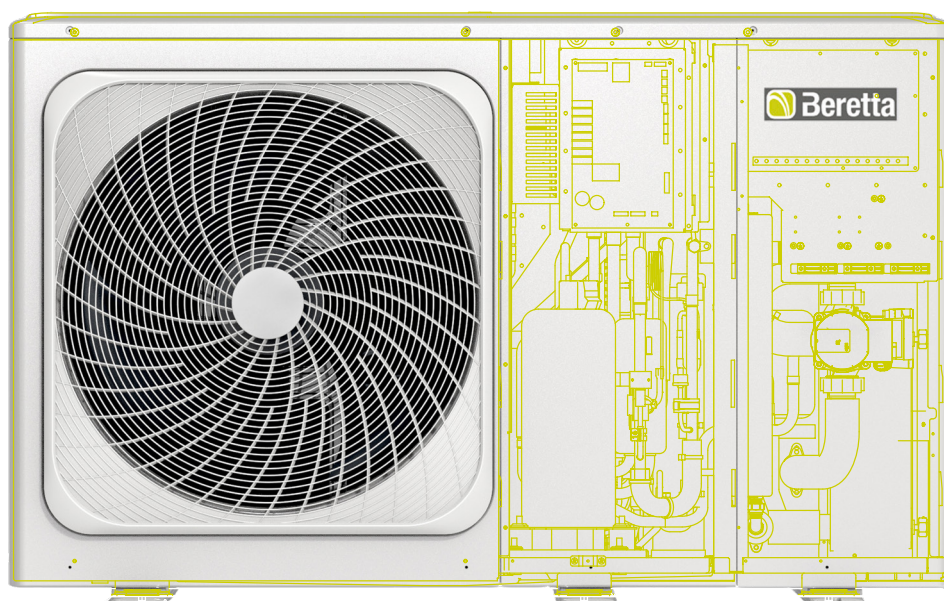


- **INVERTER CONTROL BOARD** maximizes power under critical load conditions and provides stability and efficiency under partial loads
- **AISI 316 STAINLESS-STEEL PLATE HEAT EXCHANGER:** protected with closed-cell anti-condensation insulation, it offers high heat-exchange efficiency
- **OPERATING PARAMETERS CONTROL BOARD** constantly analyzes the ambient temperature and the water temperature to activate the different components and satisfy the demand
- **HYDRONIC MODULE** incorporating energy-efficient circulator, expansion vessel, automatic relief valve and safety valve
- **ELECTRONIC EXPANSION VALVE** optimizes the flow of refrigerant in all situations
- **TWIN ROTARY COMPRESSOR** the design of the Inverter System which includes the DC twin rotary compressor, the fan motor and the pump ensures precise motor speed control for the correct power required to perfectly adapt to the actual load and save energy.
- **FAN** Special blade and tip design allows optimization of the flow surface, improving efficiency and reducing fan noise
- **HEAT EXCHANGER BATTERY** with large surface and aluminum fins



## MULTIPLE HYDRO UNIT M INSTALLATIONS

HYDRO UNIT M allows up to six units to be connected together to meet the heating, cooling and sanitary domestic hot water requirements of small apartment blocks and light commercial operations. Each of the units responds individually to demand from the room in which it is installed.

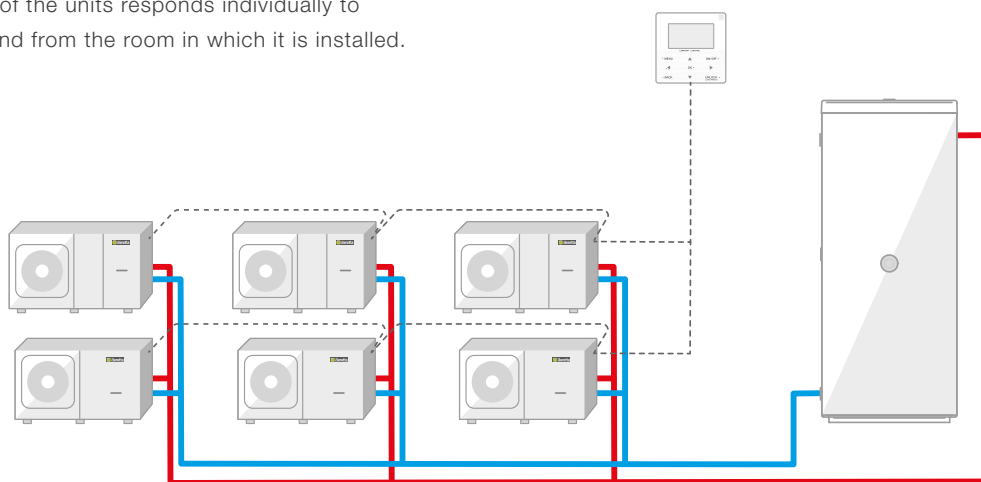



## EASY SYSTEM MANAGEMENT

### ADVANCED REMOTE CONTROL


This control, incorporated in all HYDRO UNIT M installations, features a multi-language display and offers the following functions:

- Management of up to six units connected in cascaded system
- Activation of the scheduled functions such as the anti-frost and vacation options, giving the end user's peace of mind



### REC10MH MANAGEMENT MODULE

Designed for full-electric and hybrid applications, this module is installed within the building and offers user-friendly management of the entire system. If the system incorporates a hybrid distribution system, REC10MH manages the multi-zone system to optimize system operation. The control is equipped with a color display and multi-language menu.

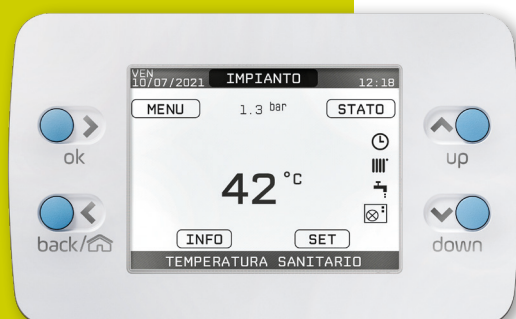

### USB


Each HYDRO UNIT M is equipped with a USB port for connection of USB flash storage devices to upgrade the unit's firmware.






## A WIDE RANGE OF ACCESSORIES

HYDRO UNIT M can be supplied with various accessories to adapt it to different installation types:




### REC10MH REMOTE CONTROL

for complete management of full-electric and hybrid systems




### 50 L BUFFER TANK

designed for vertical installation




### TEMPERATURE SENSOR

Allows to manage temperature operation for the balancing of tanks or the 2 zone flow temperature or the solar temperature




### 1"¼ DIVERTER VALVE

also available in the storage tank heating element kit



### SUPPLEMENTARY HEATING ELEMENT

to increase the system's speed of response to demand from the installation environment. Available in 2kW up to 6kW single or three phase versions




### STORAGE TANK HEATING ELEMENT


managed by the REC10MH control, with 2.2 kW single-phase power output, it incorporates the three-way bypass valve and storage tank sensor

## TECHNICAL DATA AND SPECIFICATIONS

### HYDRO UNIT M 004-006

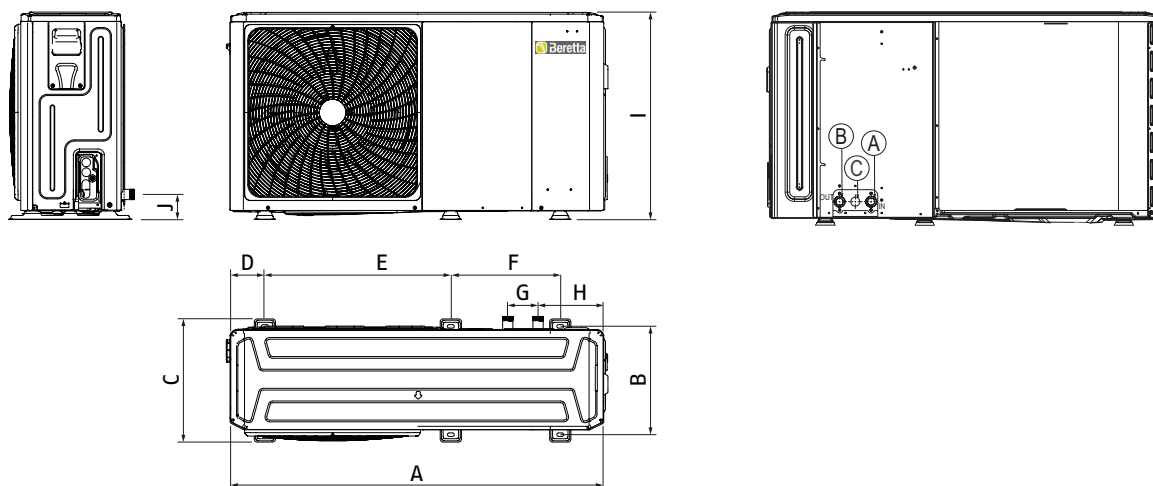

### HYDRO UNIT M 008÷016

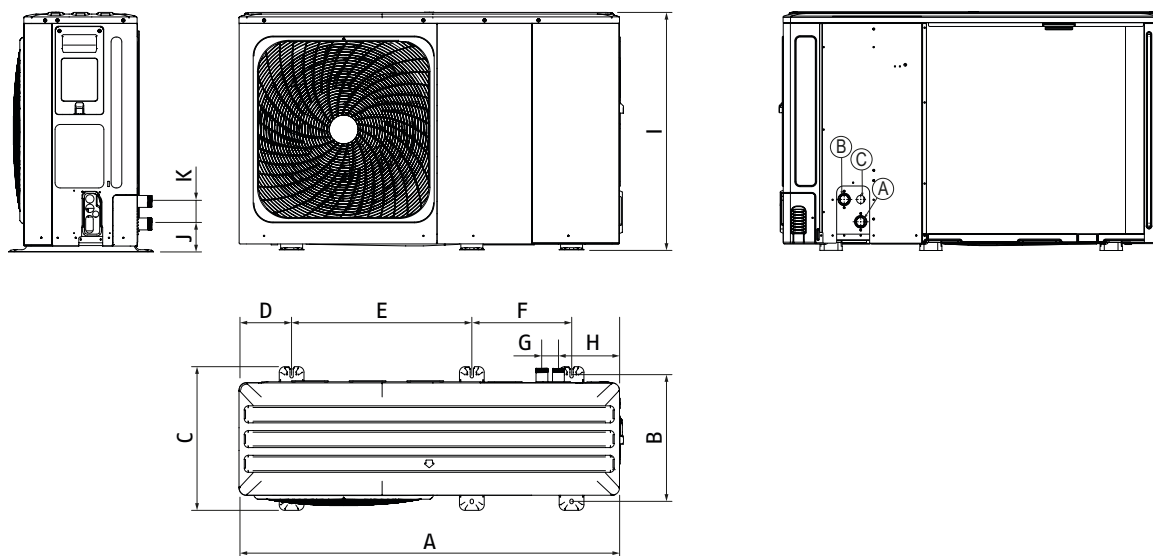

A. Water inlet connection

B. Water outlet connection


C. Discharge connection

## DIMENSIONS AND WEIGHT


MODEL	UoM	A	B	C	D	E	F	G	H	I	J	K
4 - 6	mm	1295	375	426	120	644	379	105	225	718	87	/
8 - 10 - 12 - 14 - 16 12T - 14T - 16T	mm	1385	458	523	192	656	363	60	221	865	101	81
	UoM	4	6	8	10	12	14	16	12T	14T	16T	
Net weight	kg	86	86	105	105	129	129	129	144	144	144	



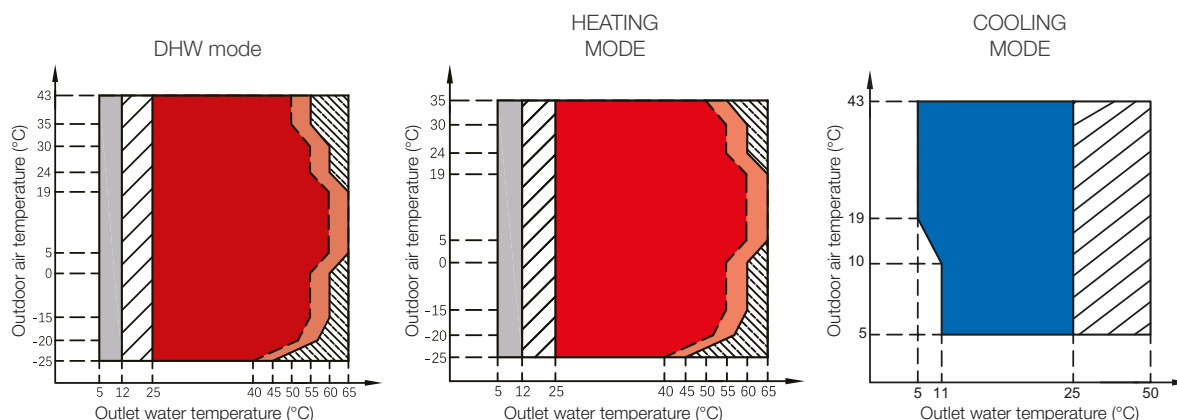

## OPERATING LIMITS




### KEY

 If Backup Electric Heater / Additional Heat Source setting is valid, only Backup Electric Heater / Additional Heat Source turns on; If Backup Electric Heater / Additional Heat Source setting is invalid, only heat pump turns on. Limitation and protection may occur during heat pump operation.

 Heat pump turns off, only Backup Electric Heater/ Additional Heat Source turns on.

 Operation range by heat pump with possible limitation and protection.

 Maximum inlet water temperature line for heat pump operation.

## TECHNICAL DATA

	UoM	4	6	8	10	12	14	16	12T	14T	16T	Note
<b>HEATING PERFORMANCE DATA</b>												
<b>Heating performance (A7°C; W35°C)</b>												
Nominal heat output	kW	4,20	6,35	8,40	10,00	12,10	14,50	15,90	12,10	14,50	15,90	1
COP		5,10	4,95	5,15	4,95	4,95	4,60	4,50	4,95	4,60	4,50	1
Energy efficiency class		A+++	A+++	A+++	A+++	A+++	A+++	A+++	A+++	A+++	A+++	6
<b>Heating performance (A7°C; W45°C)</b>												
Heat output	kW	4,30	6,30	8,10	10,00	12,30	14,10	16,00	12,30	14,10	16,00	2
COP		3,80	3,70	3,85	3,75	3,70	3,60	3,50	3,70	3,60	3,50	2
<b>Heating performance (A7°C; W55°C)</b>												
Heat output	kW	4,40	6,00	7,50	9,50	11,90	13,80	16,00	11,90	13,80	16,00	3
COP		2,95	2,95	3,18	3,10	3,05	2,95	2,85	3,05	2,95	2,85	3
Energy efficiency class		A++	A++	A++	A++	A++	A++	A++	A++	A++	A++	7
<b>COOLING PERFORMANCE DATA</b>												
<b>Cooling performance (A35°C; W18°C)</b>												
Cooling power	kW	4,50	6,50	8,30	9,90	12,00	13,50	14,20	12,00	13,50	14,20	4
EER		5,50	4,80	5,05	4,55	3,95	3,61	3,61	3,95	3,61	3,61	4
<b>Cooling performance (A35°C; W7°C)</b>												
Cooling power	kW	4,70	7,00	7,45	8,20	11,50	12,40	14,00	11,50	12,40	14,00	5
EER		3,45	3,00	3,35	3,25	2,75	2,5	2,5	2,75	2,5	2,5	5
<b>SOUND DATA</b>												
Sound pressure	dB(A)	45,0	47,5	48,5	50,5	53,0	53,5	57,5	53,5	54,0	58,0	8
Sound power	dB(A)	55	58	59	60	65	65	68	65	65	68	9
<b>ELECTRICAL DATA</b>												
Supply voltage	V/ph/Hz	230/1/50							400/3/50			

(1) Outside air temperature 7°C DB, 6°C WB; water inlet/outlet 30/35°C

(2) Outside air temperature 7°C DB, 6°C WB; water inlet/outlet 40/45°C

(3) Outside air temperature 7°C DB, 6°C WB; water inlet/outlet 47/55°C

(4) Outside air temperature 35°C; water inlet/outlet 23/18°C

(5) Outside air temperature 35°C; water inlet/outlet 12/7°C

(6) Value refers to the average climate profile for a feed temperature of 35°C. Values compliant with regulation (EU) 811/2013

(7) Value refers to the average climate profile for a feed temperature of 55°C. Values compliant with regulation (EU) 811/2013

(8) Measured at a position of 1m in front of the unit and (1+unit height)/2m above the floor in a semi-anechoic chamber

(9) Declared value in compliance with EN 12102-1



**RIELLO S.p.A.**  
Via Ing. Pilade Riello 7,  
37045 Legnago (VR), Italy  
tel. +39 0442 630111  
[www.berettaheating.com](http://www.berettaheating.com)

Beretta reserves the right to make changes to the specifications and data contained in this document at any time and without prior notice, for the purposes of product improvement.  
This document is therefore not binding and has no contractual value.

